

Brass gate valve

Fig. 5311

Standard

设计标准: GB/T8464

螺纹阀体盖•全通路

防爆阀杆•聚四氟乙烯密封

螺纹符合: BS 21 (ISO7) / ASME B1.20.1

尺寸范围: 15mm(1/2")~50mm(2")

测试标准: GB/T13927

Technical data

工作压力: 600 psi (41.3 bar) 水 (无冲击)

150 psi (10.3 bar) 饱和蒸汽

测试压力: 壳体: 900 psi (62 bar) 水(静压)

密封: 660 psi (45.5 bar) 水(静压)


80 psi (5.5 bar) 气体

使用介质: 水、油、气体

Material

Part	Material	Standard
Body	Brass	12165 CW617N
Bonnet	Brass	12165 CW617N
Ball Valve	Brass	12165 CW617N
Seak	PTFE	-
Stem	Brass	12165 CW617N
O-ring	NBR	-
Handwheel	carbon steel	-

Schema

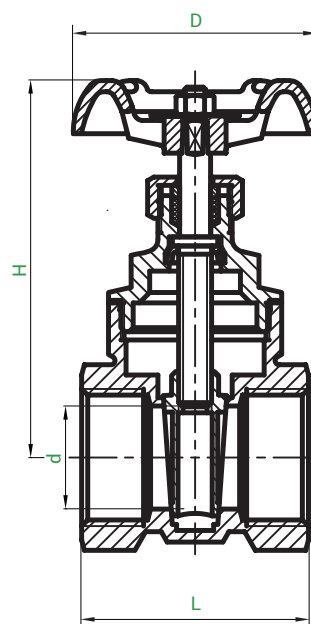

Dimensions

DN	mm	15	20	25	32	40	50
	inch	1/2	3/4	1	1-1/4	1-1/2	2
L		53	57	72	79	89	105
H		46	51	56	64	68	81
D		95	110	110	140	140	160