

Globe Valve Brass

Fig. 5611

Standard

Design standard: GB/T8464

Threaded bonnet • Rotatable spool

Rising stem • Asbestos-free seal

Threads comply: BS 21 (ISO7) / ASME B1.20.1

Size Range: 15mm(1/2")~50mm(2")

Test standard: GB/T13927

Technical data

Operating pressure: 232 psi (16 bar) water (no impact)

100psi (7 bar) saturated steam

Test Pressure: Housing: 348 psi (24 bar) Water (Static Pressure)

Sealed: 255 psi (17.6 bar) Water (hydrostatic)


80 psi (5.5 bar) gas

Medium used: water, oil, gas

Material

Part	Material	Standard
Body	Brass	12165 CW617N
Bonnet	Brass	12165 CW617N
Stem	Brass	12165 CW617N
Tighten nut	Brass	12165 CW617N
Stuffing	PTFE	-
Spool	Brass	12165 CW617N
Handwheel	Aluminum alloy	-

Schema

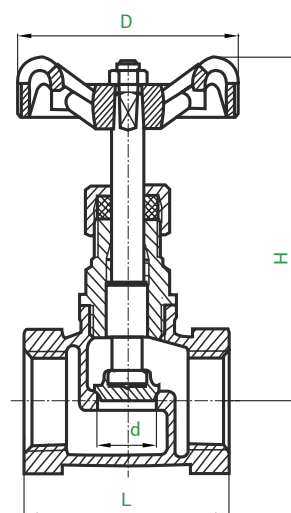

Dimensions

DN	mm	15	20	25	32	40	50
	inch	1/2	3/4	1	1-1/4	1-1/2	2
L		46	52	65	74	85	95
H		64	69	77	93	104	126
D		55	55	60	72	80	100