

Air Vent Brass

Fig. 7911

Standard

Design criteria: threaded valve cover • rotating disc

Lifting stem • Asbestos-free

Threads comply: BS 21 (ISO7) / ASME B1.20.1

Size Range: 15mm(1/2")~25mm(1")

Test standard: GB/T13927

Technical data

Operating pressure: 232 psi (16 bar) water (no impact)

Test Pressure: Housing: 348 psi (24 bar) Water (Static Pressure)

Sealed: 255 psi (17.6 bar) Water (hydrostatic)


80 psi (5.5 bar) gas

Medium used: water

Material

Part	Material	Standard
Body	Brass	12165 CW617N
Spool	Brass	12165 CW617N
Stem	Brass	12165 CW617N
Bonnet	Brass	12165 CW617N
Washer	NBR	-
Stem cover	Brass	12165 CW617N
Connector	Brass	12165 CW617N
Valve core	Brass	12165 CW617N
Float	PTFE	-
Float column	Brass	12165 CW617N
O-ring	NBR	-
Spring	Stainless steel	3111 304S31

Schema

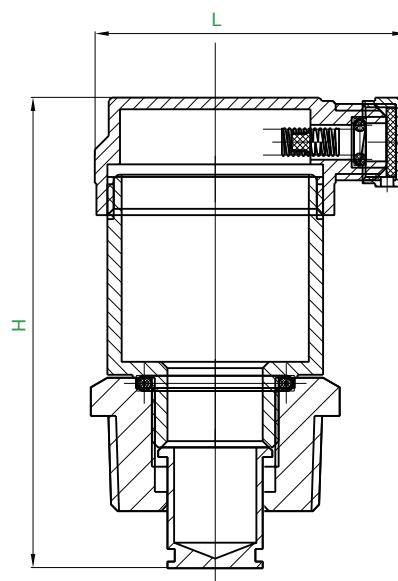

Dimensions

DN	mm	15	20	25
	inch	1/2	3/4	1
L		50	50	50
H		76	76	76