

Micro Air Vent Valve

Stainless steel Body • Threaded Type

Fig. 7915

Sizes 3/8" through 1 1/2"

SPECIFICATION

Connection Standard: BS21 (ISO7)

Test Standard: EN12266

TECHNICAL DATA

Working Pressure: $0.2 \text{ bar} \leq P \leq 12 \text{ bar}$

Sizes: DN10 to DN40

Test Pressure: Shell: 16 bar

Seat: 11 bar


Working Temperature: -20°C to $+110^{\circ}\text{C}$ (EPDM)

MATERIAL LIST

Part	Material	Standard
Spiral hat	Reinforced nylon	Nylon fiberglass
Exhaust cover	Reinforced nylon	Nylon fiberglass
Screw cover	stainless steel	304
O-ring	NBR	-
Connecting	stainless steel	304
Main housing	stainless steel	304
pontoon	polyethylene	PE-HD
O-ring	NBR	-
Screw sleeve	stainless steel	304
Adapter sleeve	stainless steel	304
Spring	stainless steel	304
Filter	stainless steel	304
O-ring	NBR	-

DIMENSIONS

DN	mm	10	15	20	25	32	40
	inch	3/8	1/2	3/4	1	1-1/4	1-1/2
H		83	83	83	83	83	83
H2		17	17	17	17	17	17
W		34	34	34	34	34	34
G		G 3/8"	G 1/2"	G 3/4"	G 1"	G 1-1/4"	G 1-1/2"

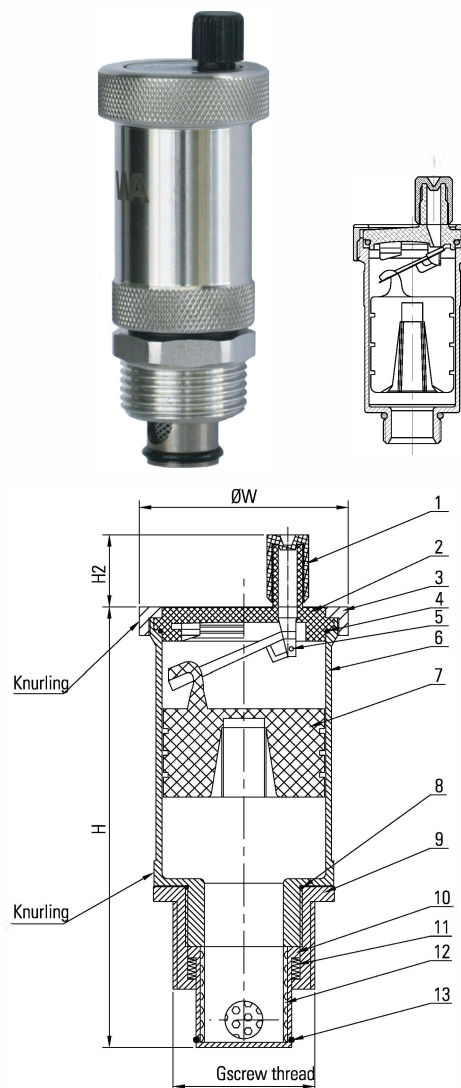

Visit our website for the most current information.