

Mini Ball Valve - Threaded (I/E)

Fig. 4135

Stainless steel Body • Geometric Drive • Threaded Type

Sizes 1/4" through 1"

SPECIFICATION

Design standard: API 598 / EN 12266

Thread compliance: ANSI B 2.1 / BS 21 (ISO7)

Size Range: 6mm(1/4")~25mm(1")

TECHNICAL DATA

Working Pressure: 1000 psi (PN63) Water (non-shock)



Test Pressure: Shell: 1500 psi (95 bar) Water (static)

Seat: 1100 psi (70 bar) Water (static)

80 psi (5.5 bar) Gas

Working Temperature: -25°C to +180°C

Media: Water, Oil, Gas

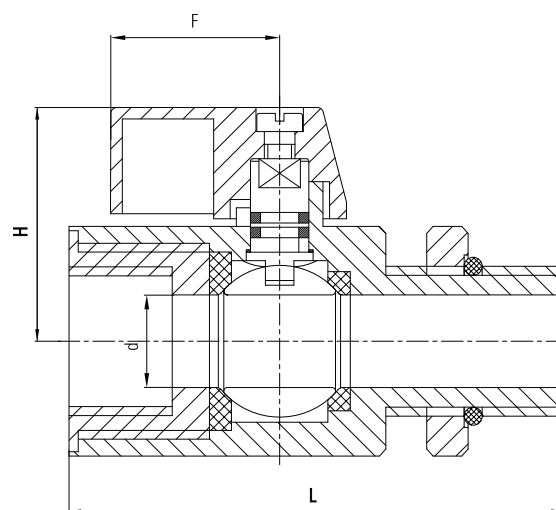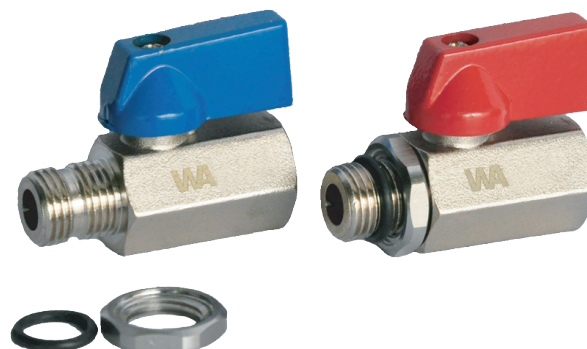

MATERIAL LIST

Part	Material	Standard
Body	Stainless steel	A351 CF8 / CF8M
Bonnet	Stainless steel	A351 CF8 / CF8M
Ball Valve	Stainless steel	ASTM 304 / 316
Seat	PTFE	-
Stem	Stainless steel	ASTM 304 / 316
Seal	PTFE	-
Nut	Stainless steel	ASTM 304 / 316
Handle	Stainless steel	-

DIMENSIONS

DN	mm	6	10	15	20	25
	inch	1/4	3/8	1/2	3/4	1
L		40	45	56	59	71
H		32	33	42	45	48
F		68	68	95	95	95
Ød		5	7	9	12.5	15

Visit our website for the most current information.