

Sanitary Filter

Fig. 7275

Stainless steel Body • Replaceable filter screen
• Flanged Type / Clamp Type / Welding Type

Sizes 3/4" through 4"

SPECIFICATION

Compliant with ISO/IDF, DIN, 3A, SMS, BS, RJT, ASME/BPE standard pipeline installations.
Applications include food, beverage, pharmaceutical, chemical industry, and liquid cooling systems.

TECHNICAL DATA

Working Pressure: 6 bar / 10 bar

Sizes: ISO: 33.7mm to 114.3mm

DIN: DN25 to DN150

SMS: SMS25 to SMS101.63A: 1" to 4"

Clamp Connection (National Standard Flange)

(Other sizes available upon request)


Working Temperature: -10°C to +100°C (dependent on seal material)

Screen Mesh: 500 Mesh Nylon (default)



MATERIAL LIST

Part	Material	Standard
Body	stainless steel	SUS304/SUS316L
Bonnet	stainless steel	SUS304/SUS316L
Nut	stainless steel	SUS304
Seal	Rubber	VQM、FPM、EPDM
Filter	stainless steel	SUS304/SUS316L/-

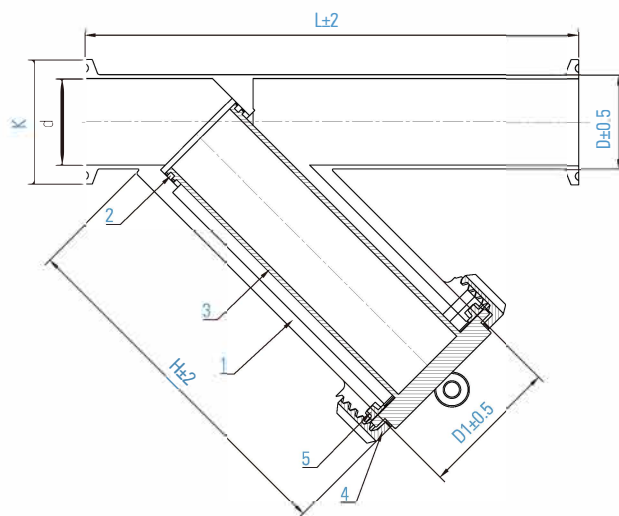

DIMENSIONS

DN	3/4"	1"	1 1/4"	1 1/2"	1 3/4"	2"	2 1/4"	2 1/2"	3"	3 1/2"	4"
L	160	160	178	200	210	230	268	268	300	340	385
K	50.5	50.5	50.5	50.5	64	64	77.5	77.5	91	106	119
d	15	21.4	27.8	34.1	41	46.8	53	59.5	72.2	84.9	97.6
D	19.1	25.4	31.8	38.1	45	50.8	57	63.5	72.2	88.9	101.6
H	116	116	116	122	136	151	176	176	191	244	248
D1	38	38	51	57	63	76	89	89	108	133	159

Visit our website for the most current information.