

Stainless Steel Flexible Hose

Stainless Steel Bellow Body • Turnable Nut & Male Thread • Threaded Type

**Fig. W215
A Type**

Sizes 1/2" through 2"

SPECIFICATION

Design in accordance with GB/T14525

Thread comply with ISO228/1

Testing standards comply with ISO5208

TECHNICAL DATA

Working Pressure: 16bar

Dimensions: DN15~DN50

Working Temperature: -10°C~220°C

Ambient Temperature: 0°C~60°C

Applicable Medium: Cold and hot water, Refrigerant,
Glycol, Hydrazine, etc

Connection: Turnable Nuts on Both Ends(BSPT)




A Type
(Turnable nut at one end ,
Male thread at one end)

OPTIONAL

The flange material can be customized according to customer requirements.

High-pressure-resistant products of more than 2Mpa can be made.

High corrosion resistance with SUS316L hose material.

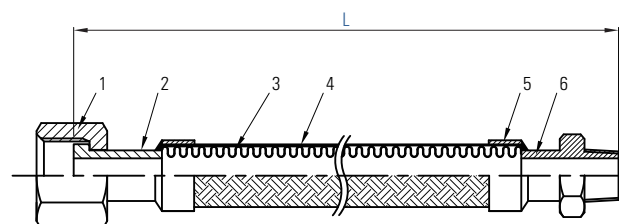

MATERIAL LIST

Part Name	Materials	Specification
Nut Fitting	Carbon steel	Q235(galvanized)
	Stainless Steel	SUS304、SUS316
Collar	Stainless Steel	SUS304、SUS316
Bellow	Stainless Steel	SUS304、SUS316
Braid	Stainless Steel	SUS304、SUS316
Sleeve	Stainless Steel	SUS304、SUS316
Welded male fittings	Stainless Steel	SUS304、SUS316

DIMENSIONS

DN	mm	15	20	25	32	40	50
	inch	1/2	3/4	1	1-1/4	1-1/2	2
L	300mm (Factory default lengths, other lengths available)						

Visit our website for the most current information.