

Clamp Stainless Steel Flexible Hose

Fig. W160

Stainless steel Bellow Body • Clamp Type


Sizes 1 " through 8"

SPECIFICATION

Design in accordance with ISO 10380
Testing standards comply with ISO5208


TECHNICAL DATA

Working Pressure: 10 bar / 16 bar
Sizes:ISO,SMS,3A: 1" to 4"
DIN: DN25 to DN150
(Other sizes available upon request)
Test Pressure: Shell: 1.5 x Working Pressure
Seat: 1.1 x Working Pressure
Working Temperature: -10°C to +120°C

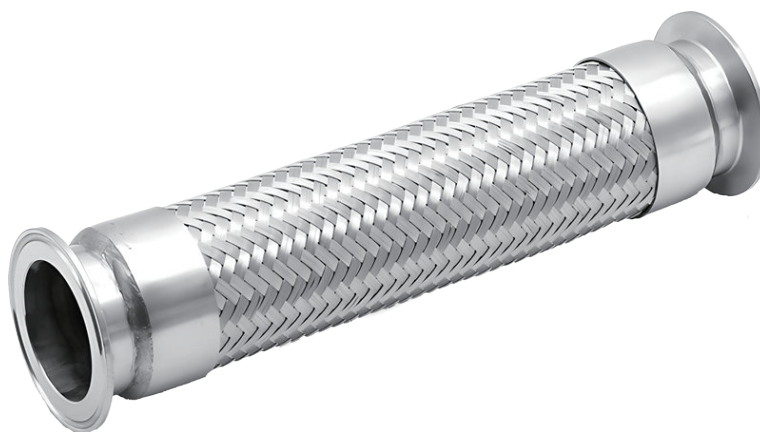

MATERIAL LIST

Part	Materials	Specification
Clamp	Stainless Steel	SUS304 / SUS316L
Collar	Stainless Steel	SUS304 / SUS316L
Bellow	Stainless Steel	SUS304 / SUS316L
Braid	Stainless Steel	SUS304 / SUS316L

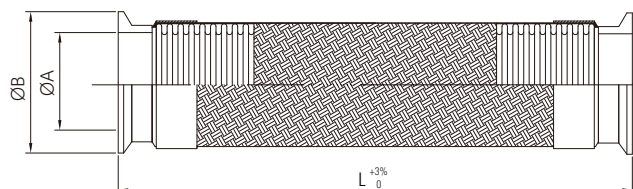

ISO/SMS/3A

Size	ØA	ØB	L*
1"	22.1	50.5	300
1 1/2"	34.8	50.5	300
2"	47.5	64	300
2 1/2"	60.2	77.5	300
3"	72.9	91	300
3 1/2"	85	106	300
4"	97.4	119	300

DIN

Size	ØA	ØB	L*
DN20	20	34	300
DN25	26	50.5	300
DN32	32	50.5	300
DN40	38	50.5	300
DN50	50	64	300
DN65	66	91	300
DN80	81	106	300
DN100	100	119	300
DN125	125	155	300
DN150	150	183	300

Visit our website for the most current information.