

Stainless Steel Flexible Hose

Fig. W290

Stainless Steel Bellow Body • Rotatable Male • Threaded Type

Sizes 1/2" through 1 1/4"

SPECIFICATION

Design in accordance with GB/T14525
Thread comply with ISO228/1
Testing standards comply with ISO5208

TECHNICAL DATA

Working Pressure: 16bar
Dimensions: DN15~DN32
Working Temperature: -10°C~120°C
Ambient Temperature: 0°C~60°C
Applicable Medium: Cold and hot water, Refrigerant, Glycol, Hydrazine, etc
Connection: Rotatable male threads on both ends(BSPT)


OPTIONAL

The flange material can be customized according to customer requirements.
High-pressure-resistant products of more than 2Mpa can be made.



(Rotatable male threads on both ends)

A Type
(Turnable nut at one end ,
Male thread at one end)

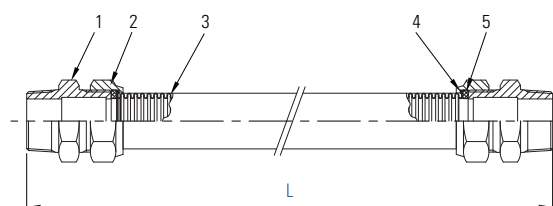

MATERIAL LIST

Part Name	Materials	Specification
Male Fittings	Brass	HPb58-2
Nut Fittings	Brass	HPb58-2
Bellow	Stainless Steel	SUS304、SUS316
Collar	Carbon Steel	-
Gaskets	Silicone Rubber	-

DIMENSIONS

DN	mm	15	20	25	32
	inch	1/2	3/4	1	1-1/4
L		300mm (Factory default lengths, other lengths available)			

Visit our website for the most current information.